


## 15 HP Two-Stage 175 PSI Industrial Series Compressors

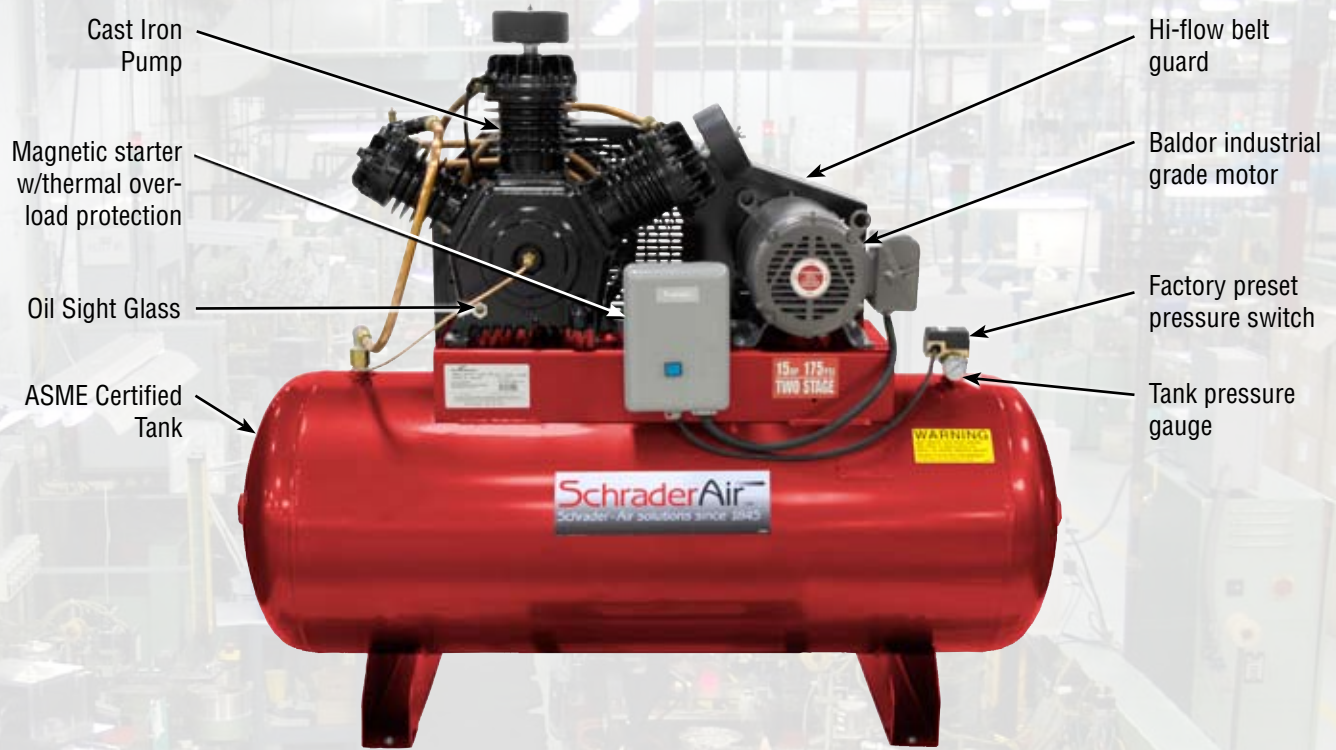

SA315120H3

***Ideally suited for tire dealers, large volume body shops, large auto repair facilities and commercial dry cleaners.***

This 2-Stage, high pressure, large capacity unit represents the next generation of industrial air compressors. The redesigned unit includes a solid cast iron, low RPM, 2-stage pump, high volume cooling fan and hi-flow belt guard as well as an aluminum air cooled after-cooler.

- Low speed, 900 RPM 3-cylinder cast iron pump provides maximum life, minimum wear
- 53.4 cfm displacement@175 PSI
- 145 - 175 PSI operating pressure
- Disc and spring valves
- Super efficient aluminum air cooled after cooler lowers the discharge temperature to within 20 degrees of ambient, extending check valve life.
- Oil sight glass
- Easy start head unloader
- Energy efficient, EISA compliant\*, Baldor industrial electric motor
- Factory installed magnetic starter provides thermal overload protection to the motor
- ASME certified tank
- Three industrial drive belts for maximum efficiency

**15 HP Professional**



**SA315120H3**

**Specifications**

Model #	Motor						Pump				Tank		Dimensions	
	HP	Voltage	Phase	FLA	Breaker Size	Wire Size*	Cyl.	RPM	Disp. CFM	SCFM @175 PSI	Gal.	Config.	L x W x H (inches)	Ship Wt. (lbs)
SA315120H3	15	208/230	3	41	80	6	3	900	60	53.4	120	H	71 x 25 x 58	900
SA315120H346	15	460	3	21	40	10	3	900	60	53.4	120	H	71 x 25 x 58	900
SA315240H3	15	208/230	3	41	80	6	3	900	60	53.4	240	H	85 x 46 x 72	1050
SA315240H346	15	460	3	21	40	10	3	900	60	53.4	240	H	85 x 46 x 72	1050

\*Wire size if under 50 feet

**Recommended Accessories**

Model #	Auto Electric Tank Drain	Install Kit	Vibration Pads Only	Drive Belt (uses 3)	Air Filter Element	Oil (capacity, qts.)	Pressure Switch	Pressure Gauge	Refrigerated Air Dryer 140°	Refrigerated Air Dryer 250°
All above	907001	824678	824679	82908	822	826020** (6)	82779	82516	SRD0150	SRD0250

\*\*Oil sold in 1 quart bottles