


Performance Light 2-Stage, 165 PSI Medium Duty Compressor



The perfect compressor for the weekend mechanic or high end hobby shop.

- Finned intercooler and aftercooler provides low operating temperature and higher efficiency.
- Cast iron cylinder provides maximum pump life.
- Enclosed belt guard for safe operation and high air flow.
- Oil sight glass.
- Splash lubrication - simple, reliable, easy to maintain.
- Easy-to-read tank gauge 0-300 PSI.
- Factory preset pressure control switch, on at 135 PSI, off at 165 PSI.
- Manual drain standard, Automatic drain available.
- 1-year limited parts and labor warranty.
- Assembled in USA

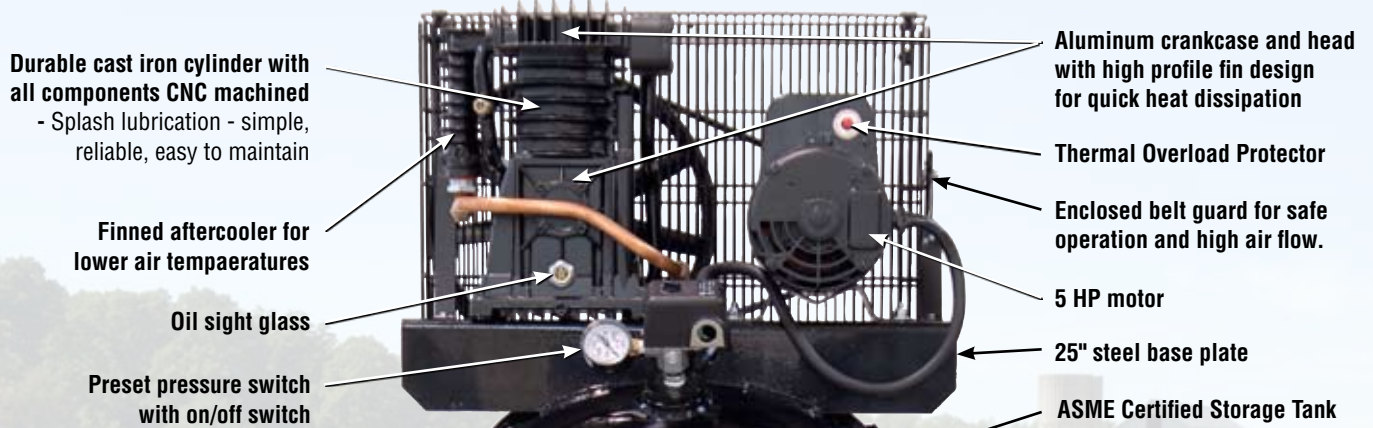

SA2560VL

Performance Light 2-Stage, 165 PSI Medium Duty Compressor



SA2560VL

Specifications

Model #	Motor						Pump					Tank		Dimensions	
	HP	Volt.	Phase	Amp Draw	Breaker Size	Wire Size*	Cyl.	RPM	Max PSI	Disp. CFM	SCFM @165 PSI	Size (Gallons)	Config.	L x W x H (inches)	Ship Wt. (lbs)
SA2560VL	5	208/230	1	22	40	12	2	1365	165	19.5	13.7	60	V	30 x 22 x 68	300

*Minimum wire size required if less than 50' from power source breaker box.

Recommended Accessories

Model #	Auto Electric Tank Drain	Install Kit	Vibration Pads Only	Drive Belt	Oil (capacity)	Air Filter	Pressure Switch	Pressure Gauge	Refrigerated Air Dryer 140°
SA2560VL	907001	824678	824679	821312100132	826020** (1.49 qt.)	823095	821312100410	821400111	SRD0025

**Sold in 1 quart bottles